

POWERSCREEN® HORIZON 6203

3 DECK HORIZONTAL SCREEN



TECHNICAL SPECIFICATION - REV 11. 01/01/2019





HORIZON 6203



OVERVIEW

SPECIFICATION

Total weight	46,700kg (102,956lbs)
Transport	Length 19.54m (64' 1")
	Height 3.6m (11' 10")
	Width 3.24m (10' 8")
Working	Length 18.7m (61' 5")
	Height 4.8m (15' 9")
	Width 16.27m (53' 5")
Screenbox:	6.1m x 1.93m (20' x 6' 4")
Power Unit	Diesel / Hydraulic
Plant Colour	RAL 5021, RAL 7024 & RAL 9005

(Weight & dimensions are approximate base unit values)

FEATURES & BENEFITS

- High capacity up to 800 tph / 881 US tph (depending on media sizes & material type)
- Maximum feed size 250mm (10"). Maximum allowable feed size may vary depending on material type and screenbox media
- Quick set-up time
- Maximum mobility with heavy duty, low ground pressure crawler tracks
- Removable heavy duty pendant remote control system
- Optional radio control system available if required
- High performance hydraulics system
- Galvanised maintenance platforms on both sides of screen
- Hydraulically folding for transport
- Heavy duty triple shaft horizontal screenbox with adjustable stroke, angle & speed
- Direct feed hopper with impact bars & rollers
- Roll-in chute system

APPLICATIONS



Aggregate

Sand & gravel
Blasted rock
River rock



Recycling

Top soil
C&D waste
Composed materials
Wood by-products
Overburden
Foundry waste



Mining

Processed ores
Processed minerals



HORIZON 6203



HOPPER

Target area: 5.23m (17' 2") long x 2.7m (8' 10") wide


Hopper capacity: 8.2m³ (10.72 cu. yd.)

Feed in height: 3.4m (11' 2") (rear door lowered)

Feed in height: 3.75m (12' 4") (rear door raised)

Hydraulic folding hopper sides

Wear resistant steel on hopper sides

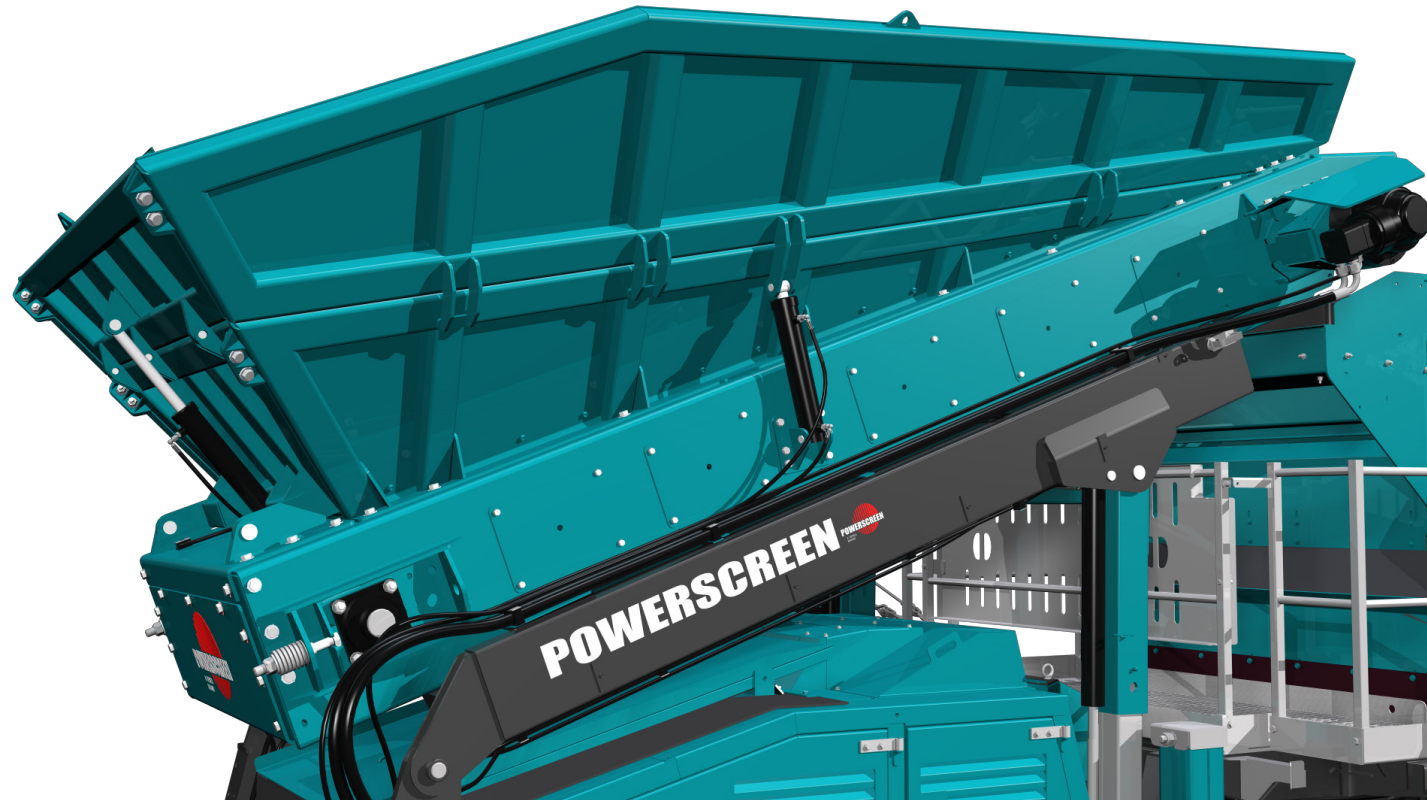



HORIZON 6203



BELT FEEDER

1300mm (4' 3") 4 ply plain belt

Direct drive system with twin direct gearboxes


Variable speed control

Impact bars and 'extra heavy' duty rollers fitted beneath belt

Drum centres: 4.36m (14' 4")

Drum diameter (drive): 375mm (14.8")

Drum diameter (tail): 320mm (12.6")

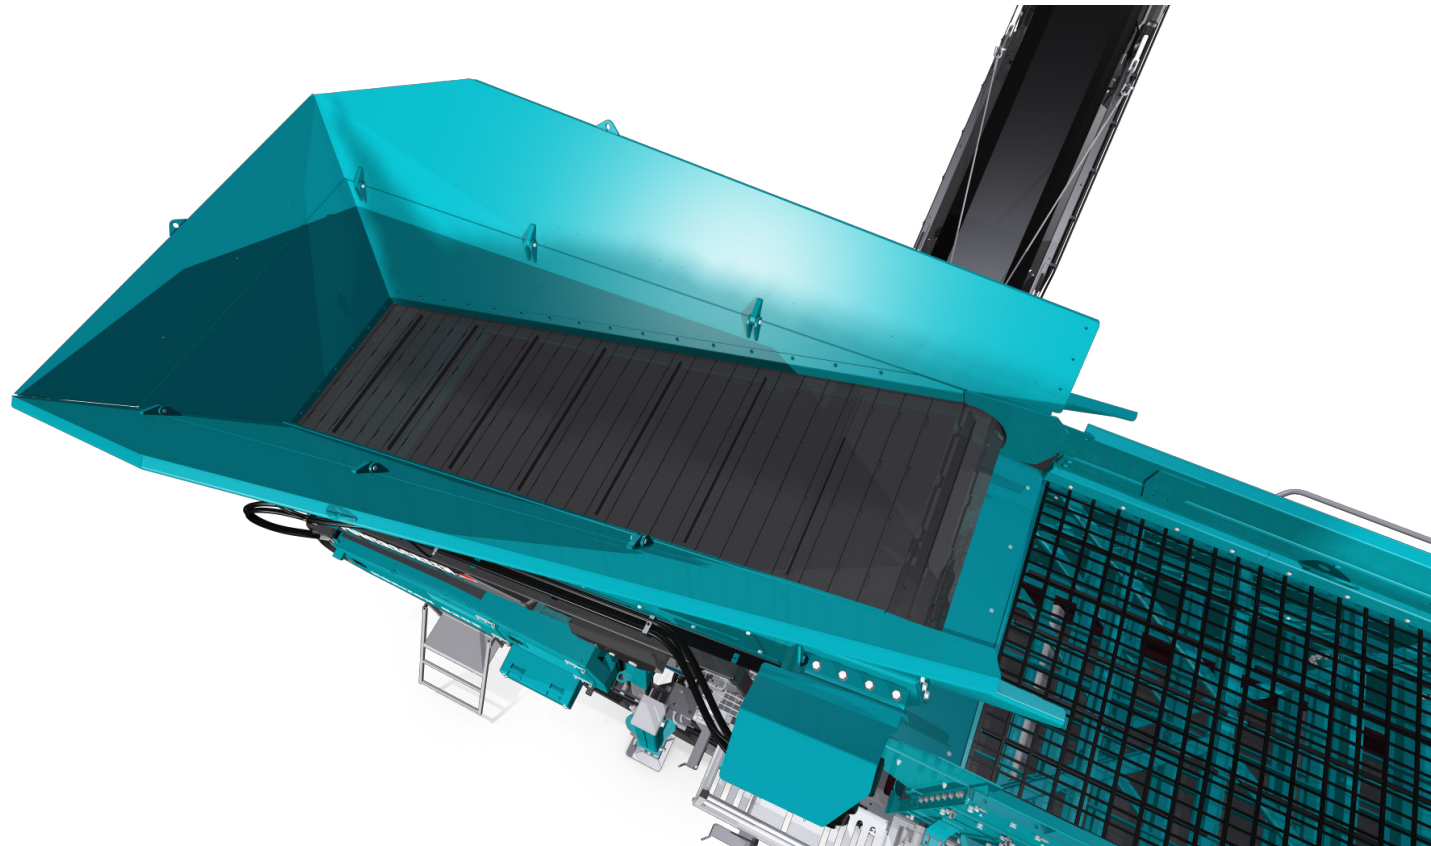



HORIZON 6203




SCREENBOX

6.1m x 1.93m (20' x 6' 4") (All 3 decks)
3 deck triple shaft horizontal screenbox
Oval stroke adjustable up to maximum of 19mm
Oval stroke angle adjustable from 30° - 60°

Breaker-box with wear resistant steel replaceable wearplate
Hi-torque screen motor mounted direct to
Screenbox, pulley driven
Marshmallow springs
Wear plates on pipeunits

Side tensioned all decks
Quick release wedge tensioning system
(optional depending on screen media)

Roll-in chute system

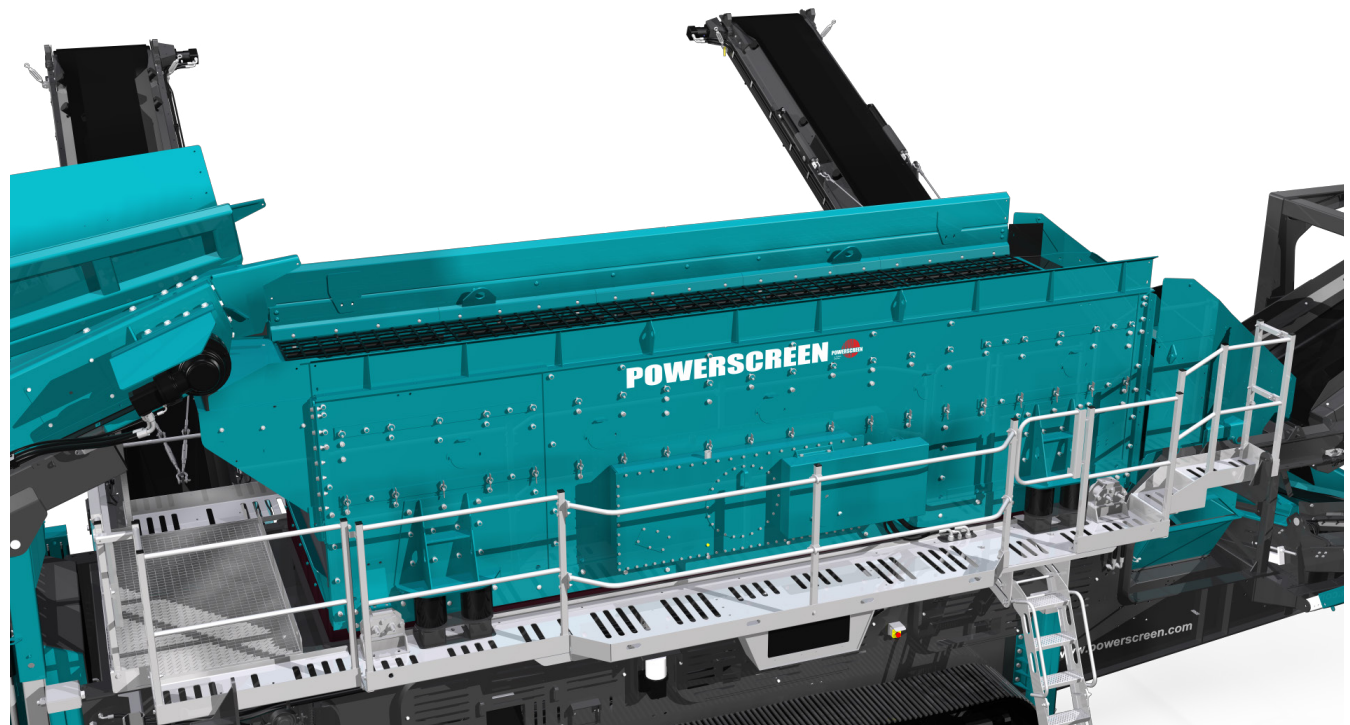



HORIZON 6203



POWER UNIT & HYDRAULICS


Engine Tier 3 Equivalent: Tier 3 / Stage IIIA - CAT C6.6
Performance: 151 kW (202hp) @ 2200rpm

Engine Tier 4/ Stage IV: Tier 4F/ Stage IV CAT C7.1
Performance: 151 kW (202hp) @ 2200rpm

Tank capacity
Fuel: 597 L (158 US Gal)
Hydraulic Oil: 780 L (206 US Gal)

Pumps
Flywheel pump: Cast iron quad 63/63/32/32cc/rev
PTO pump: Cast iron tandem 29/29cc/rev

Motors
Belt feeder: 125cc/rev x 2
Under screen conveyor: 630cc/rev
Finessize conveyor: 500cc/rev
Upper midsize conveyor: 500cc/rev
Lower midsize conveyor: 500cc/rev
Oversize conveyor: 800cc/rev
Screen: 93cc/rev bent axis
Optional apron feeder: 400cc/rev

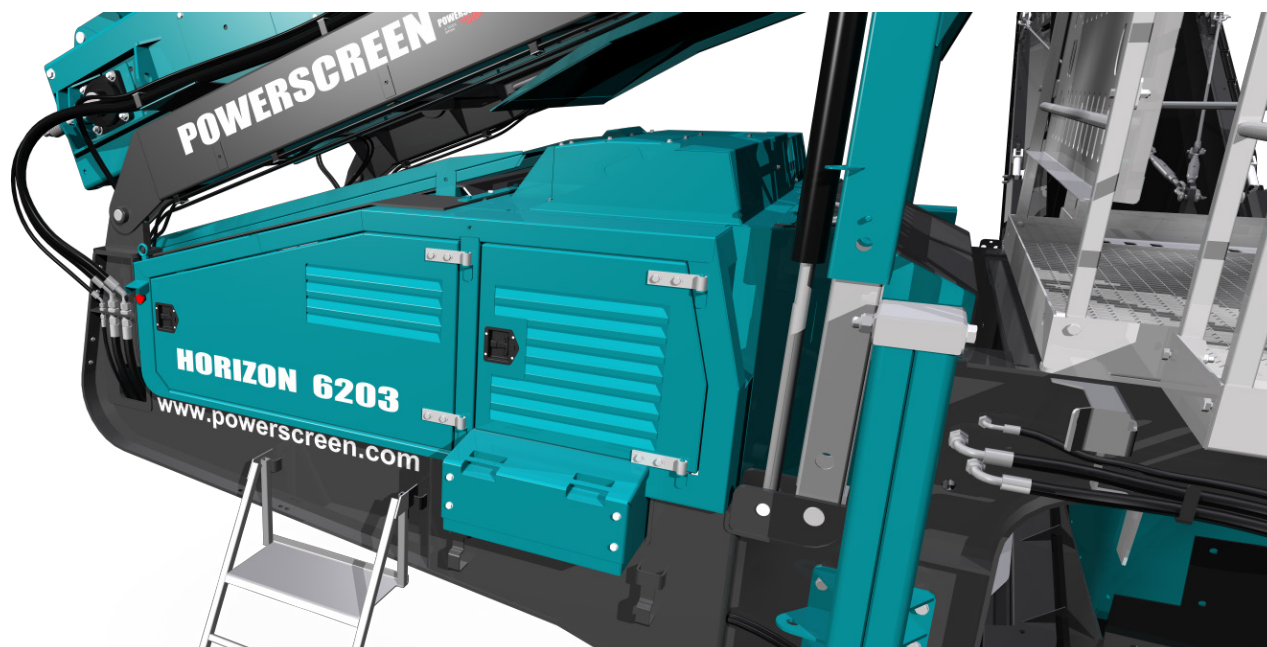



HORIZON 6203



TRACKS

Track width: 500mm (1'8")

Sprocket centres: 3836mm (12'7")

Gradability degrees: 26°

Two speed tracks

High: 1.1kph (0.68mph)

Low: 0.55kph (0.34mph)

Flow rate: 134 Lpm





HORIZON 6203



CONVEYORS - UNDERSCREEN & FINESIZE

UNDERSCREEN CONVEYOR

1500mm (4' 11") 3 ply plain belt
Direct drive system
Variable speed control


Drum centres: 6.25m (20' 6")
Drum diameter (drive): 270mm (10.6")
Drum diameter (tail): 270mm (10.6")

FINESIZE - SIDE CONVEYOR

900mm (2' 11") 3 ply plain belt
Angle adjustment: 14° - 25°
Stockpile height: 4.3m (14' 1")
Stockpile capacity: 119m³ (156 cu. yd.)

Hydraulically folding
Impact bars under feedboot
Direct drive system
Variable speed control

Drum centres: 9.5m (31' 2")
Drum diameter (drive): 286mm (11.3")
Drum diameter (tail): 203mm (8")

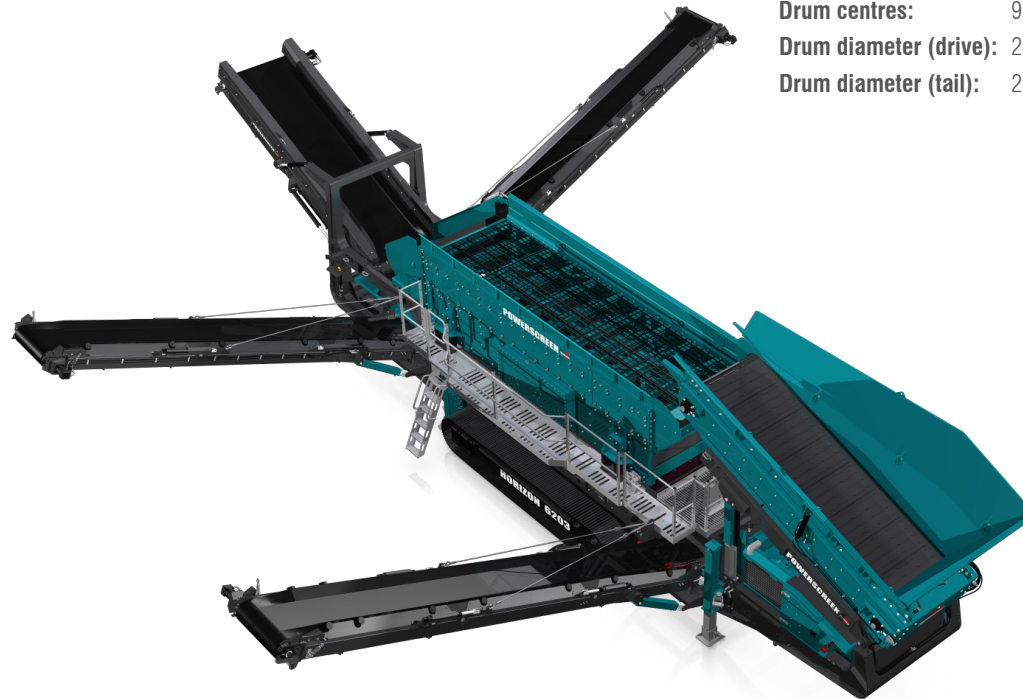



HORIZON 6203



CONVEYORS - MIDSIZE & OVERSIZE

MID-FINESIZE & MID-OVERSIZE - SIDE CONVEYOR

900mm (2' 11") 3 ply plain belt

Angle adjustment:

14° - 25°

Stockpile height:

4.4m (14' 5")

Stockpile capacity:

129m³ (166 cu. yd.)

Hydraulically folding

Impact bars under feedboot

Direct drive system

Variable speed control

Drum centres: 8.92m (29' 3")

Drum diameter (drive): 286mm (11.3")

Drum diameter (tail): 203mm (8")

OVERSIZE - TAIL CONVEYOR

1400mm (4' 7") 4 ply plain belt

Angle adjustment:

10° - 25°

Stockpile height:

4m (13' 1")

Stockpile capacity:

95m³ (124 cu. yd.)

Direct drive system

Variable speed control

Impact bars

Conveyor slide out system to aid screen mesh changing

Drum centres: 5.15m (16' 11")

Drum diameter (drive): 286mm (11.3")

Drum diameter (tail): 203mm (8")





HORIZON 6203



↓ OPTIONS

ROLL-IN CHUTES

Double deck roll in chute system
Roll aside to enable mesh access

INCLINE APRON FEEDER

1300mm (4' 3") wide
Wear resistant feed apron
Direct drive system with single gearbox
Variable speed control

Apron centres: 4.3m (14' 1")

Tracks: c/w 4.2m

OTHER OPTIONS

- Custom colour machine
- Auto lubrication system
- Radio controlled tracking
- Wear resistant or mild steel punch plate screens
- Roll-in bogie transport system
- Roll-in chute with hinged trap doors offering blending options between decks
- Chevron belts
- Hydraulic oil grade 68
- Powerscreen Pulse
- Dual Power System c/w 4.2m (13' 9") track, IE3 Electric motors 75kW (100hp) and 55kW (73hp), diesel engine and integrated control system controlling either diesel-hydraulic or electric-hydraulic functions.





HORIZON 6203




POWERSCREEN PULSE

RECORD, DISPLAY AND ANALYSE DATA:

HIGH EFFICIENCY THROUGH PRECISE INFORMATION

Available online anywhere and at any time: comprehensive information on the GPS location, start and stop times, fuel consumption, tonnages, cone settings, wear ratings, operating hours, maintenance status, and much more.

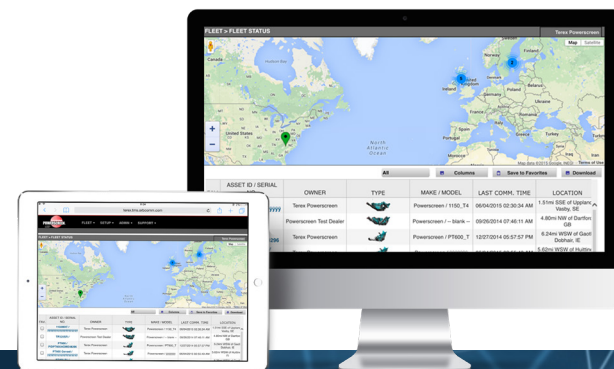


**AVAILABLE
ANYWHERE
AND AT ANY TIME**


**DASHBOARD
DISPLAY**


**FLEET
OVERVIEW**


**WEEKLY REPORT
DIRECT TO YOUR
INBOX**


**GPS: MACHINE
TRACKING**


**REPORTING
UTILISATION, PERFORMANCE
& PART SPECIFIC**




HORIZON 6203



DIMENSIONS

Figure 1: Horizon 6203
Working Position

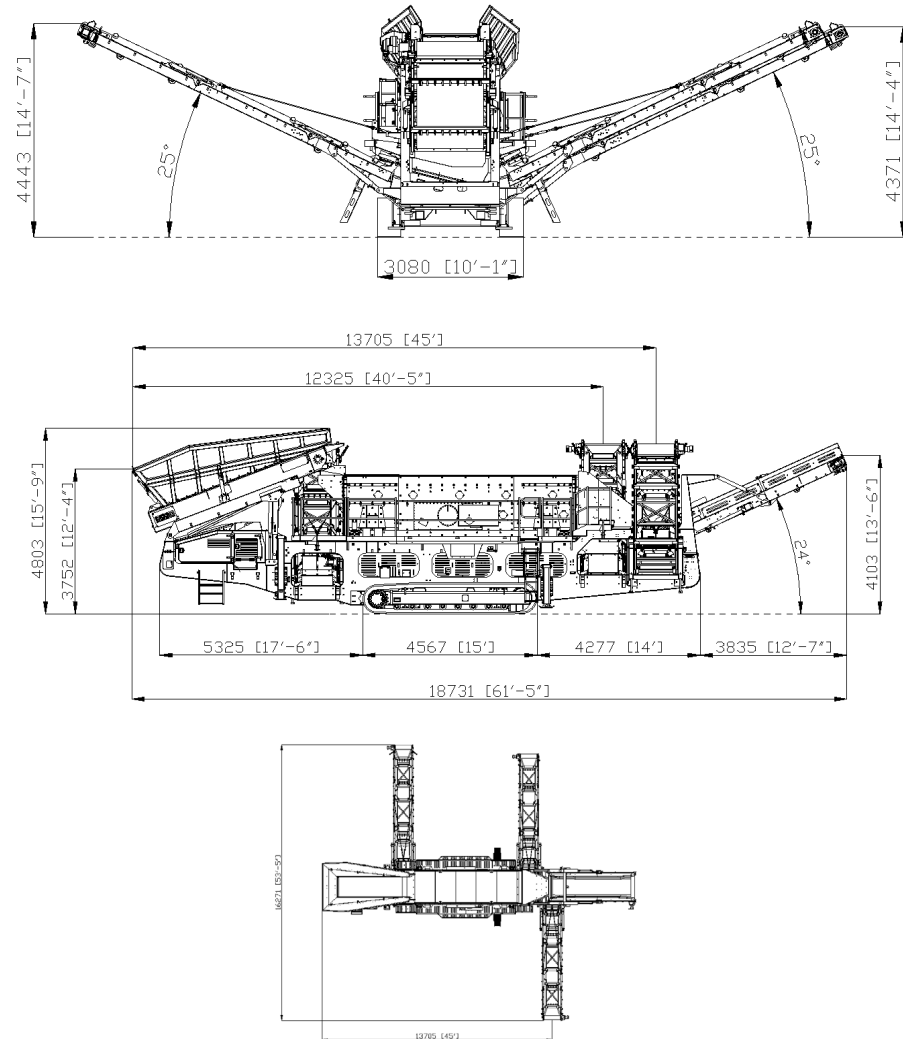

MORE DIMENSIONS OVERLEAF




HORIZON 6203



DIMENSIONS

Figure 2: Horizon 6203
Transport Position

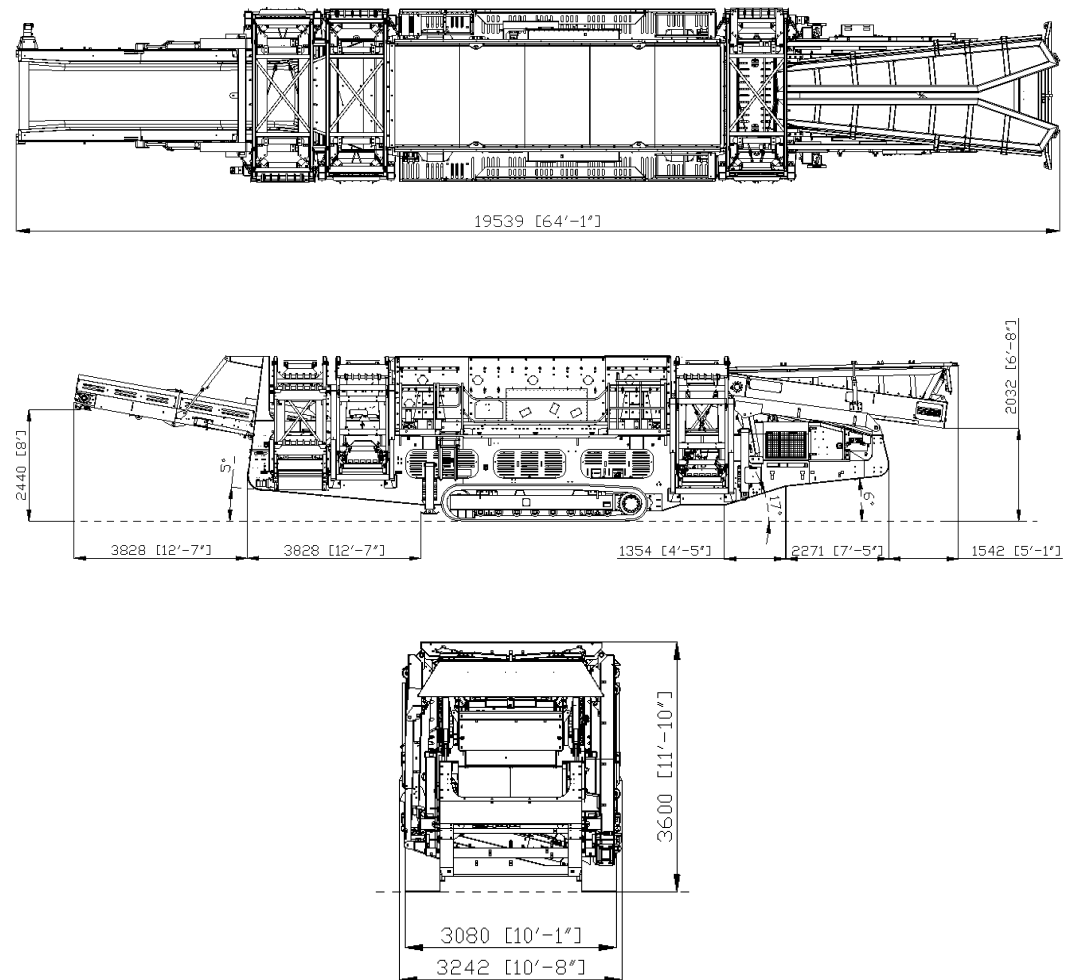



Powerscreen equipment complies with CE requirements.

Please consult Powerscreen if you have any other specific requirements in respect of guarding, noise or vibration levels, dust emissions, or any other factors relevant to health and safety measures or environmental protection needs. On receipt of specific requests, we will endeavour to ascertain the need for additional equipment and, if appropriate, quote extra to contract prices.

All reasonable steps have been taken to ensure the accuracy of this publication, however due to a policy of continual product development we reserve the right to change specifications without notice.

It is the importers' responsibility to check that all equipment supplied complies with local legislation regulatory requirements.

Plant performance figures given in this brochure are for illustration purposes only and will vary depending upon various factors, including feed material gradings and characteristics. Information relating to capacity or performance contained within this publication is not intended to be, nor will be, legally binding.

GET IN TOUCH

Dungannon

200 Coalisland Road, Dungannon,
Co Tyrone, BT71 4DR, Northern Ireland
Tel: +44 (0) 28 87 718 500
Fax: +44 (0) 28 87 747 231

Louisville

11001 Electron Drive,
Louisville, Kentucky, 40299 USA
Tel: +1 502 736 5200
Fax: +1 502 736 5202

